


TECHNICAL DATA

MULTIPURPOSE COMPACTOR

BMP 8500



Flexible working widths
Original BOMAG drum extensions



Safe operation
Radio/cable remote control with
integrated operator protection



Higher quality, lower costs
ECONOMIZER - The compaction
display (optional)

Shipping dimensions in m3

BMP 8500


2,056

Standard Equipment

- ECOMODE
- Drum extensions (610/850mm)
- Hydrostatic articulated steering, maintenance free
- Combination remote control cable/radio
- Dual directed-vibration system
- Two travel speed ranges
- 2 amplitudes
- Intelligent Vibration Control (IVC)
- Electric starter
- BOMAG Operator Safety System
- 2 scrapers per drum
- Battery disconnect switch
- Automatic shutdown at low oil level
- Automatic engine shut down at a lateral tipping angle of 45°
- Full prot. hoods made of impact resistant compound material
- Single point lifting device
- Lockable engine cover and dash board
- Easy Service Concept
 - Diagnostic module with fault code display
 - Hour meter
 - foldable full protection hood
- 3-2-1 Warranty

Optional Equipment

- Environmentally compliant hydraulic oil
- Smooth drum (-45kg Amplitude 1,59/0,86mm)
- Special painting
- Mobile quick charger
- Scrapers 610/850mm
- Service Kit
- ECONOMIZER
- TOUGH WARRANTY

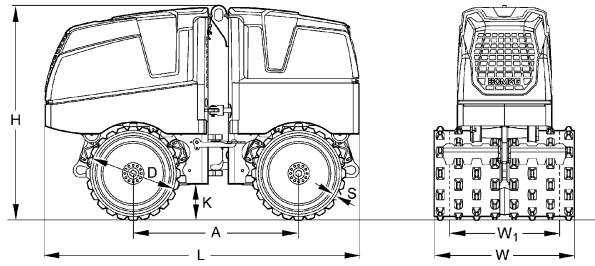

Dimensions in mm

	A	D	H	K	L	S	W	W1
BMP 8500	1000	520	1275	197	1897	16	850	610

Technical Data

Weights

Operating weight CECE	kg	1.595
Basic weight	kg	1.585
Average axle load CECE	kg	798

Driving Characteristics

Speed (1), forward	km/h	1,2
Speed (1), reverse	km/h	1,2
Speed (2), forward	km/h	2,8
Speed (2), reverse	km/h	2,8
Max. gradeability without/with vibr.	%	55/45

Drive

Engine manufacturer	Kubota
Type	D 1005
Emission stage	Stage V / TIER4f
Cooling	water
Number of cylinders	3
Performance ISO 3046	kW 14,5
Speed	min-1 2.600
Fuel	Diesel
Drive system	hydrost.
Driven drum	4
Fuel comsump. aver. during operation	l/h 3,1

Brakes

Service brake	hydrost.
Parking brake	hydromec.

Exciter system

Vibrating drum	front + rear
Drive system	hydraulic
Frequency	Hz 42/42
Amplitude	mm 1,12/0,56
Centrifugal force	kN 72/36

Capacities

Fuel	l	24,0
------------	---	------

Technical modifications reserved. Machines may be shown with options.



PRE 720 12 010

120918 Sa03

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

