

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 25/40, BPR 25/40 D



Robust and reliable
Best component protection




Precise and save to operate
Comfortable control lever



Simple and safe transport
Transport wheels (optional)

Shipping dimensions in m3

BPR 25/40 0,385
BPR 25/40 D 0,432

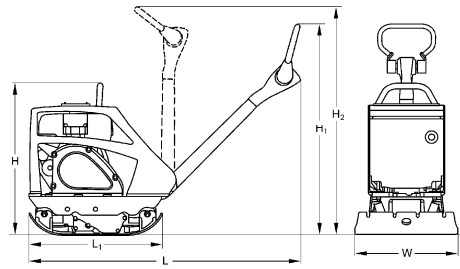

Standard Equipment

- Protective engine covering
- Comfortable control lever
- Low vibration steering rod
- Height adjustable steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Fully protected V-belt
- Recoil starter
- Back-up drive protection
- Automatic shutdown at low oil level (BPR25/40)
- Automatic decompression (BPR25/40D)
- 3-2-1 Warranty

Optional Equipment

- Sprinkler system (+13kg)
- Tool kit
- Special painting
- Plastic mat
- Transport wheels, puncture-proof (+4kg)
- Service Kit
- US Version EPA 4 NRTC (BPR25/40D)
- TOUGH WARRANTY

Dimensions in mm

	H	H1	H2	L	L1	W
BPR 25/40	660	930	1080	1460	650	400
BPR 25/40 D	740	930	1080	1460	650	400

Technical Data

Weights

Operating weight CECE (W)	kg	135	150
Basic weight	kg	132	147

Dimensions

Basic working width	mm	400	400
Lowest passing height	mm	660	740
Min. height w. steering in top position	mm	930	930
Max. height w. steering in top position	mm	1.250	1.250

Driving Characteristics

Working speed, max.	m/min	25	25
Max. gradeability (dep. on soil con.)	%	30	30

Drive

Engine manufacturer		Honda	Hatz
Type		GX 160	1B20
Emission stage		StageV/CARB P.3	Stage V
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	kW	3,6	
Performance ISO 3046	kW		3,1
Speed	min-1	3.600	3.000
Drive system		mech.	mech.
Fuel		Gasoline	Diesel
Fuel comsump. aver. during operation	l/h	1,1	0,7

Exciter system

Frequency	Hz	85	85
Centrifugal force	kN	25	25
Amplitude	mm	1,55	1,55

Capacities

Fuel	l	3,1	3,0
Water	l	12,0	12,0

Technical modifications reserved. Machines may be shown with options.



PRE 692 65 010

300120 Sa04

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

